


# BELLOWS CAPSULE 12" L/L 1-PLY

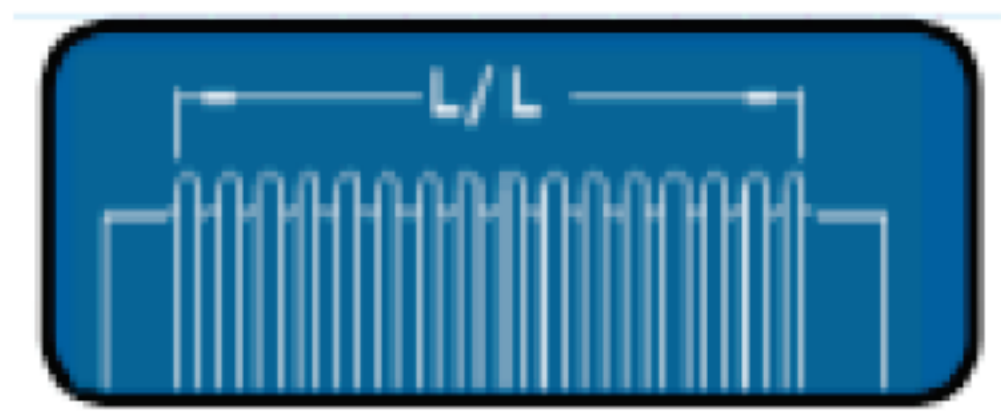

## T-321 S/S SINGLE-PLY

**1200° MAX EXHAUST  
TEMPERATURE AT 5 PSIG**

BELLOWS I.D.	BELLOWS L/L	AXIAL COMP	LATERAL OFFSET	SP CAPSULE PART NUMBER
4.00"	12.00"	2.00"	1.50"	11-40120
4.50"	12.00"	2.00"	1.50"	11-45120
5.00"	12.00"	3.25"	1.50"	11-50120
5.56"	12.00"	3.50"	1.50"	11-55120
6.00"	12.00"	3.50"	1.50"	11-60120
6.625"	12.00"	3.50"	1.50"	11-65120
8.00"	12.00"	3.50"	1.25"	11-80120
8.625"	12.00"	3.50"	1.25"	11-85120
10.00"	12.00"	4.00"	1.25"	12-100120
10.75"	12.00"	4.00"	1.25"	11-105120
12.00"	12.00"	4.00"	1.00"	11-120120
12.75"	12.00"	4.00"	1.00"	11-125120
14.00"	12.00"	4.50"	1.00"	11-140120
16.00"	12.00"	4.50"	1.00"	11-160120
18.00"	12.00"	4.50"	.88"	11-180120
20.00"	12.00"	4.50"	.75"	11-200120
22.00"	12.00"	4.50"	.75"	11-220120
24.00"	12.00"	4.50"	.63"	11-240120
26.00"	12.00"	4.50"	.63"	11-260120
28.00"	12.00"	4.50"	.50"	11-280120
30.00"	12.00"	4.50"	.50"	11-300120
32.00"	12.00"	4.50"	.50"	11-320120
34.00"	12.00"	4.50"	.50"	11-340120
36.00"	12.00"	4.50"	.50"	11-360120
38.00"	12.00"	4.50"	.38"	11-380120
40.00"	12.00"	4.50"	.38"	11-400120
42.00"	12.00"	4.50"	.38"	11-420120
44.00"	12.00"	4.50"	.38"	11-440120
46.00"	12.00"	4.50"	.38"	11-460120
48.00"	12.00"	4.50"	.38"	11-480120

## HASTELLOY X SINGLE-PLY

**1500° MAX EXHAUST  
TEMPERATURE AT 5 PSIG**

BELLOWS I.D.	BELLOWS L/L	AXIAL COMP	LATERAL OFFSET	SP CAPSULE PART NUMBER
4.00"	12.00"	2.00"	1.50"	11-40120-X
4.50"	12.00"	2.50"	1.50"	11-45120-X
5.00"	12.00"	3.25"	1.50"	11-50120-X
5.56"	12.00"	3.25"	1.50"	11-55120-X
6.00"	12.00"	3.50"	1.50"	11-60120-X
6.625"	12.00"	3.50"	1.50"	11-65120-X
8.00"	12.00"	3.50"	1.50"	11-80120-X
8.625"	12.00"	3.50"	1.50"	11-85120-X
10.00"	12.00"	4.00"	1.25"	12-100120-X
10.75"	12.00"	4.00"	1.25"	11-105120-X
12.00"	12.00"	4.00"	1.25"	11-120120-X
12.75"	12.00"	4.00"	1.00"	11-125120-X
14.00"	12.00"	3.75"	1.00"	11-140120-X
16.00"	12.00"	3.75"	.88"	11-160120-X
18.00"	12.00"	3.75"	.75"	11-180120-X
20.00"	12.00"	3.75"	.75"	11-200120-X
22.00"	12.00"	3.75"	.63"	11-220120-X
24.00"	12.00"	4.00"	.63"	11-240120-X
26.00"	12.00"	4.00"	.63"	11-260120-X
28.00"	12.00"	4.00"	.50"	11-280120-X
30.00"	12.00"	4.00"	.50"	11-300120-X
32.00"	12.00"	4.00"	.50"	11-320120-X
34.00"	12.00"	4.00"	.50"	11-340120-X
36.00"	12.00"	4.00"	.38"	11-360120-X
38.00"	12.00"	4.00"	.38"	11-380120-X
40.00"	12.00"	4.00"	.38"	11-400120-X
42.00"	12.00"	4.00"	.38"	11-420120-X
44.00"	12.00"	4.00"	.25"	11-440120-X
46.00"	12.00"	4.00"	.25"	11-460120-X
48.00"	12.00"	4.00"	.25"	11-480120-X

## INCONEL 625 SINGLE-PLY

**1300° MAX EXHAUST  
TEMPERATURE AT 5 PSIG**

BELLOWS I.D.	BELLOWS L/L	AXIAL COMP	LATERAL OFFSET	SP CAPSULE PART NUMBER
4.00"	12.00"	2.00"	1.50"	11-40120-625
4.50"	12.00"	2.50"	1.50"	11-45120-625
5.00"	12.00"	3.25"	1.50"	11-50120-625
5.56"	12.00"	3.25"	1.50"	11-55120-625
6.00"	12.00"	3.25"	1.50"	11-60120-625
6.625"	12.00"	3.25"	1.50"	11-65120-625
8.00"	12.00"	3.25"	1.25"	11-80120-625
8.625"	12.00"	3.25"	1.25"	11-85120-625
10.00"	12.00"	3.50"	1.25"	12-100120-625
10.75"	12.00"	3.50"	1.25"	11-105120-625
12.00"	12.00"	3.50"	1.00"	11-120120-625
12.75"	12.00"	3.50"	1.00"	11-125120-625
14.00"	12.00"	4.00"	1.00"	11-140120-625
16.00"	12.00"	4.00"	1.00"	11-160120-625
18.00"	12.00"	4.00"	.88"	11-180120-625
20.00"	12.00"	4.00"	.75"	11-200120-625
22.00"	12.00"	4.00"	.75"	11-220120-625
24.00"	12.00"	4.00"	.63"	11-240120-625
26.00"	12.00"	4.00"	.63"	11-260120-625
28.00"	12.00"	4.00"	.50"	11-280120-625
30.00"	12.00"	4.50"	.50"	11-300120-625
32.00"	12.00"	4.50"	.50"	11-320120-625
34.00"	12.00"	4.50"	.50"	11-340120-625
36.00"	12.00"	4.50"	.50"	11-360120-625
38.00"	12.00"	4.50"	.38"	11-380120-625
40.00"	12.00"	4.50"	.38"	11-400120-625
42.00"	12.00"	4.50"	.38"	11-420120-625
44.00"	12.00"	4.50"	.38"	11-440120-625
46.00"	12.00"	4.50"	.38"	11-460120-625
48.00"	12.00"	4.50"	.38"	11-480120-625

\*36 T321 AND UP RATED 2 PSIG @ 1200° F OR 5 PSIG @ 1000° F

AXIAL AND LATERAL MOVEMENTS ARE NON CONCURRENT

NOTE: TEMPERATURE RATINGS ARE FOR THE BELLOWS ELEMENT ONLY AND CONSIDERATION MUST BE GIVEN TO THE FLANGE AND FITTING MATERIALS.

