


# EXTREME MOVEMENT BELLOWS CAPSULE

UP TO 15.00" L/L  
UP TO 7.25" AXIAL

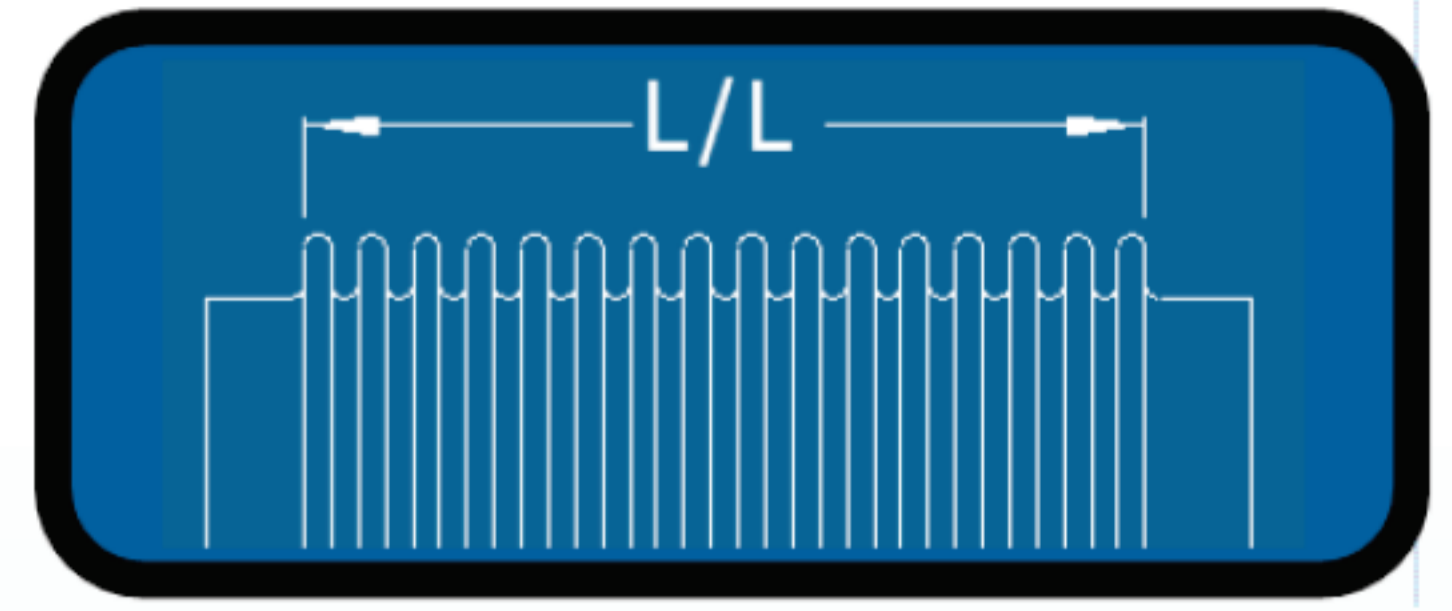

## T-321 S/S SINGLE-PLY

**1200° MAX EXHAUST TEMPERATURE AT 5 PSIG**

BELLOWS I.D.	BELLOWS L/L	AXIAL COMP	LATERAL OFFSET	SP CAPSULE PART NUMBER
6.00"	13.00"	4.00"	2.00"	11-60150
6.625'	13.00"	4.25"	2.00"	11-65150
8.00"	13.50"	4.25"	1.88"	11-80150
8.625"	13.50"	4.25"	1.88"	11-85150
10.00"	15.00"	5.50"	1.88"	11-100150
10.75"	15.00"	5.50"	1.88"	11-105150
12.00"	15.00"	5.00"	1.75"	11-120150
12.75"	15.00"	5.00"	1.75"	11-125150
14.00"	15.00"	6.00"	1.75"	11-140150
16.00"	15.00"	6.00"	1.63"	11-160150
18.00"	15.00"	6.00"	1.50"	11-180150
20.00"	15.00"	6.00"	1.38"	11-200150
22.00"	15.00"	6.00"	1.25"	11-220150
24.00"	15.00"	6.75"	1.25"	11-240150
26.00"	15.00"	6.75"	1.13"	11-260150
28.00"	15.00"	6.75"	1.13"	11-280150
30.00"	15.00"	6.75"	1.06"	11-300150
32.00"	15.00"	6.75"	1.00"	11-320150
34.00"	15.00"	6.75"	.88"	11-340150
36.00"	15.00"	6.75"	.88"	11-360150
38.00"	15.00"	6.75"	.75"	11-380150
40.00"	15.00"	6.75"	.75"	11-400150
42.00"	15.00"	6.75"	.75"	11-420150
44.00"	15.00"	6.75"	.63"	11-440150
46.00"	15.00"	6.75"	.63"	11-460150
48.00"	15.00"	6.75"	.63"	11-480150

## HASTELLOY X SINGLE-PLY

**1500° MAX EXHAUST TEMPERATURE AT 5 PSIG**

BELLOWS I.D.	BELLOWS L/L	AXIAL COMP	LATERAL OFFSET	SP CAPSULE PART NUMBER
6.00"	13.00"	4.00"	2.00"	11-60150-X
6.625'	14.00"	4.50"	2.13"	11-65150-X
8.00"	15.00"	4.75"	2.25"	11-80150-X
8.625"	15.00"	4.75"	2.25"	11-85150-X
10.00"	15.00"	5.50"	2.00"	11-100150-X
10.75"	15.00"	5.50"	2.00"	11-105150-X
12.00"	15.00"	5.50"	1.88"	11-120150-X
12.75"	15.00"	5.50"	1.88"	11-125150-X
14.00"	15.00"	6.00"	1.75"	11-140150-X
16.00"	15.00"	6.00"	1.75"	11-160150-X
18.00"	15.00"	6.00'	1.50"	11-180150-X
20.00"	15.00"	6.00"	1.38"	11-200150-X
22.00"	15.00"	6.00"	1.25"	11-220150-X
24.00"	15.00"	6.88"	1.25"	11-240150-X
26.00"	15.00"	6.75"	1.13"	11-260150-X
28.00"	15.00"	6.75"	1.06"	11-280150-X
30.00"	15.00"	6.75"	1.00"	11-300150-X
32.00"	15.00"	6.75"	.93"	11-320150-X
34.00"	15.00"	6.75"	.88"	11-340150-X
36.00"	15.00"	6.75"	.88"	11-360150-X
38.00"	15.00"	6.75"	.75"	11-380150-X
40.00"	15.00"	6.75"	.75"	11-400150-X
42.00"	15.00"	6.75"	.75"	11-420150-X
44.00"	15.00"	6.75"	.63"	11-440150-X
46.00"	15.00"	6.75"	.63"	11-460150-X
48.00"	15.00"	6.75"	.63"	11-480150-X

## INCONEL 625 SINGLE-PLY

**1300° MAX EXHAUST TEMPERATURE AT 5 PSIG**

BELLOWS I.D.	BELLOWS L/L	AXIAL COMP	LATERAL OFFSET	SP CAPSULE PART NUMBER
6.00"	13.00"	4.00"	2.00"	11-60150-625
6.625'	14.00"	4.25"	2.13"	11-65150-625
8.00"	15.00"	4.75"	2.25"	11-80150-625
8.625"	15.00"	4.50"	2.25"	11-85150-625
10.00"	15.00"	5.50"	2.00"	11-100150-625
10.75"	15.00"	5.50"	2.00"	11-105150-625
12.00"	15.00"	5.50"	1.88"	11-120150-625
12.75"	15.00"	5.50"	1.88"	11-125150-625
14.00"	15.00"	6.00"	1.75"	11-140150-625
16.00"	15.00"	6.00"	1.75"	11-160150-625
18.00"	15.00"	6.00"	1.50"	11-180150-625
20.00"	15.00"	6.00"	1.50"	11-200150-625
22.00"	15.00"	6.00"	1.38"	11-220150-625
24.00"	15.00"	7.25"	1.25"	11-240150-625
26.00"	15.00"	7.25"	1.00"	11-260150-625
28.00"	15.00"	7.25"	1.00"	11-280150-625
30.00"	15.00"	7.25"	1.00"	11-300150-625
32.00"	15.00"	7.25"	.88"	11-320150-625
34.00"	15.00"	7.25"	.75"	11-340150-625
36.00"	15.00"	7.25"	.75"	11-360150-625
38.00"	15.00"	7.25"	.75"	11-380150-625
40.00"	15.00"	7.25"	.63"	11-400150-625
42.00"	15.00"	7.25"	.63"	11-420150-625
44.00"	15.00"	7.25"	.63"	11-440150-625
46.00"	15.00"	7.25"	.63"	11-460150-625
48.00"	15.00"	7.25"	.50"	11-480150-625



\*36 T321 AND UP RATED 2 PSIG @ 1200° F OR 5 PSIG @ 1000° F

AXIAL AND LATERAL MOVEMENTS ARE NON CONCURRENT

NOTE: TEMPERATURE RATINGS ARE FOR THE BELLOWS ELEMENT ONLY AND CONSIDERATION MUST BE GIVEN TO THE FLANGE AND FITTING